

# BALDWIN®

TOUCHSCREEN DEADBOLTS



BALDWIN



Authorised Distributor :

SIMU VERSAILLES INDONESIA

Panglima Polim Raya 18x, Jakarta 12160,  
Indonesia +62 21 7261230

[www.selarasindah.com](http://www.selarasindah.com)  
ig @simu\_indonesia

TOUCHSCREEN



INTRODUCING

# TOUCHSCREEN

LUXURIOUS SIMPLICITY. BOLD DESIGN.

Beautifully Baldwin, This new offering combines a Touchscreen and Securescreen Technology with bold Baldwin design to create a simple electronic connected solution.



### SECURE SCREEN™ TECHNOLOGY

Features patented SecureScreen™ Technology that provides additional security by employing random digits prior to entering your personal code to prevent fingerprint and code detection.



### USER CODES

Up to 16 customizable user codes (30 for Z-Wave version) with 4 to 8 digit code length for family, guests and service professionals.



### ONE TOUCH LOCKING

Lock your door with a single touch. No need for a key or code to lock the door.



### WIRELESS SECURITY

128-bit Advanced Encryption Standard (AES) communication with Z-Wave 500 chipset.

## TOUCHSCREEN | STYLE PAIRING

### TRADITIONAL

Boulder Touchscreen +  
Canterbury Handle Grip



### CONTEMPORARY

Minneapolis Touchscreen +  
Minneapolis Handle Grip




### RUSTIC

Boulder Touchscreen +  
Boulder Handle Grip



### FINISHES

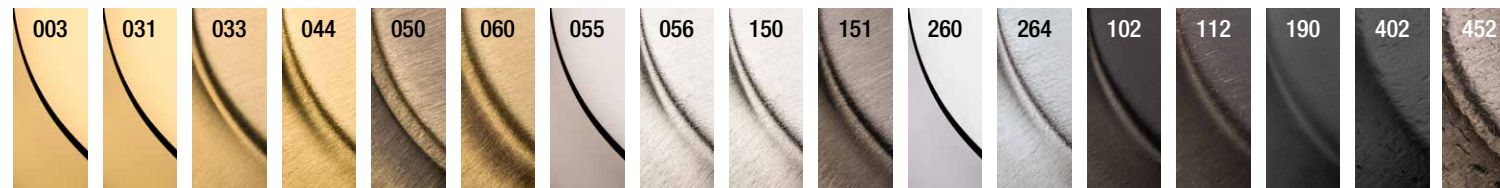


# HANDLESETS

## DEADBOLT AND HANDLESET SPECIFICATIONS

Solid Brass	Manufactured of solid brass for maximum strength and durability.
Door Thickness	1-3/4" standard with service part conversion kit available for 2" and 2-1/4" thick doors. Grip latch has a brass bolt with 0.5" throw.
Latch Bolt	Deadbolt has 1" solid brass tapered bolt and a hardened steel insert for maximum security.
Backset	Adjustable backset 2-3/8" or 2-3/4".
Face Plate	1" square corner face plate. Round corner face plate available as a service part.
Strike	Full-lip reinforcing steel strike with two (2) 3" security jamb screws, dust box and armored front to conceal the fasteners. Round corner strike available as a service part.
Door Prep	2-1/8" cross bore and 1" edge bore for latch.
Cylinder	Cylinder supplied with 5-pin keying.
ANSI/BHMA	Exceeds Grade 2 requirements in ANSI/BHMA A156.36 test standard.
UL Rated	20-minute fire rated certified UL deadbolt.
Security	128-bit Advanced Encryption Standard (AES) communication with Z-Wave 500 chipset.
Power	Deadbolt requires four AA batteries (supplied).
Smart Home Devices	Wirelessly communicate with security and smart home systems via Z-Wave.

## DEADBOLT AND HANDLESET DIMENSIONS

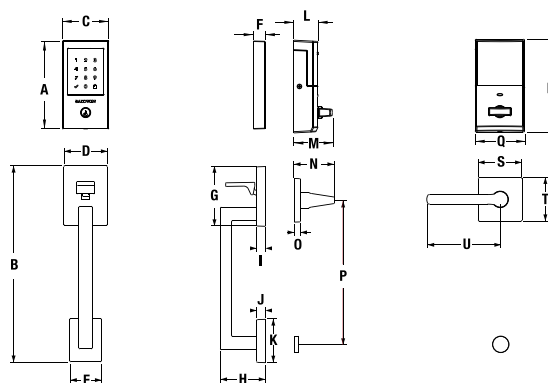

## TOUCHSCREEN DEADBOLT AND HANDLESET

	CANTERBURY	BOULDER	MINNEAPOLIS
A	6-15/16"	6-15/16"	5-9/32"
B	12-1/32"	12-19/32"	11-29/32"
C	3"	3"	2-25/32"
D	2-7/8"	2-7/8"	2-5/8"
E	2-1/8"	2-3/8"	1-29/32"
F	23/32"	23/32"	23/32"
G	4-15/32"	4-15/32"	3-5/8"
H	2-13/16"	3-5/16"	2-23/32"
I	7/16"	7/16"	17/32"
J	1/2"	17/32"	17/32"
K	2-1/8"	3-1/4"	2-5/8"
L	1-7/16"	1-7/16"	1-7/16"
M	2-13/32"	2-13/32"	2-5/16"
N	2-19/32"	2-3/32"	2-7/16"
O	3/8"	3/8"	3/8"
P	8-3/4"	8-3/4"	8-3/4"
Q	2-31/32"	2-21/32"	2-31/32"
R	6-5/8"	6-5/8"	5-19/32"
S	2-13/16"	2-13/16"	2-21/32"
T	3-15/16"	3-15/16"	2-21/32"
U	4"	4-1/8"	4-15/32"

## FUNCTIONS



Touchscreen/Single Cylinder



Full Dummy



Entry

## FINISHES



LIMITED LIFETIME WARRANTY • 1 YEAR ELECTRONIC WARRANTY • LIMITED FINISH WARRANTY